



SOLUTIONS:

For Heavy Duty Gates

D.J.A. collection of GATE HARDWARE, featuring ADJUSTABLE HINGES

The maximum capacities of hinges are based on the ratios of gate height and length.

CA345 MAXI & CA346 MAXI must be used together to achieve maximum capacity.

Max Weight (LB)	L max. (ft)						
	6' 7"	8' 2"	9' 10"	11' 6"	13' 1"	14' 9"	16' 5"
H min. (ft)	3' 3"	1323	1058	882	754	661	529
	4' 1"	1653	1323	1102	944	827	661
	4' 11"	1984	1587	1323	1133	992	794
	5' 9"	2315	1852	1543	1323	1157	1027
	6' 7"	2646	2116	1764	1510	1323	1175




CA345 MAXI (Top Hinge)

Zinc Plated
Weldable
Adjustable*
Grease Fitting
Bearing

CA346 MAXI (Bottom Hinge)

Zinc Plated
Weldable
Tapered Bearing
Grease Fitting

* For ease of maintenance, adjustments can be made with a wrench and allen key

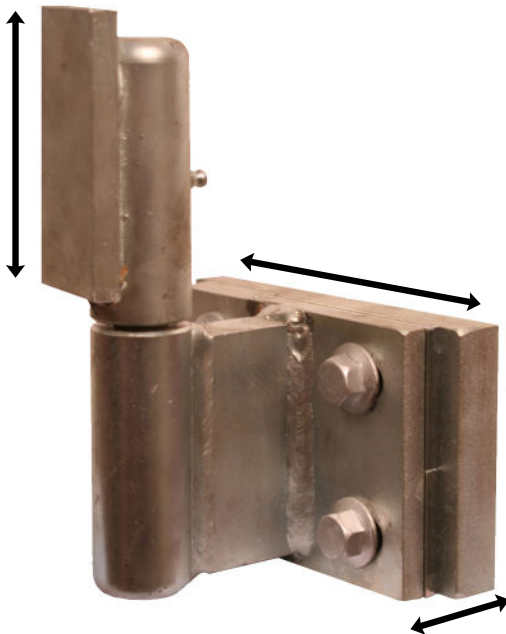

DJA Adjustable Barrel Hinge

Tri-Directional Adjustable* • Zinc Plated
Overall Height: 8" • Distance from Wall: 5"
Stainless Steel Pin: 11/16" RD
Ball Bearing: 11/16" dia.
Barrel: 1-3/8" dia. with Brass Bushing

Max Weight (LB)	L/2 max. (ft)					
	6' 8"	8' 4"	10'	11' 8"	13' 4"	16' 8"
H min. (ft)	4' 2"	2150	1750	1450	1250	900
	5'	2550	2100	1750	1500	1050
	5' 10"	3000	2450	2050	1750	1250
	6' 8"	3450	2800	2350	2000	1400

* For ease of maintenance, adjustments can be made with a wrench and allen key

1672 E. 233rd Street • Bronx, NY • 718-324-6871

www.DJAImports.com